

The Manufacturer of Professional Speaker

FERRITE

SUBWOOFER

SCB18G902

- 1800 Watt Max Power
- 99.5mm(4inch) voice coil
- 36Hz to 200Hz frequency response
- 96dB 1W@1m sensitivity
- Ferrite magnet structure
- Carbon Cone





Specifications

Model	SCB18G902	
Nominal diameter	in.	18
Power handling capacity	W(AES)	900
Max power	Watts	1800
Nominal impedance	Ω	8
Sensitivity (1W/1m)	dB	96
Frequency range	Hz	36-200
Voice coil diameter	mm/in	99.5/4
Fs	Hz	39
Re	Ω	5.5
Qms		9.50
Qes		0.50
Qts		0.48
Vas	L	134
Mms	gr	260
Cms	mm/N	0.06
BL	Tm	26.5
Le	mH	0.82
Xmax	mm	11
nO	%	1.5
Sd	cm ²	1225
Overall diameter	mm	462
Bolt circle diamete	mm	474
Baffle cut-out diameter	mm	435
Overall depth	mm	217
Net weight	Kg	15.6

- AES power is measured with 6dB crest factor continuous pink noise in 2 hours duration.
- Max power is defined as 3dB higher than the nominal rating.
- Sensitivity is measured at one meter at 2.83V and 8 ohm nominal impedance.
- All measurement of the speaker is done after a sufficient high level of 20Hz sine wave test.
- Xmas is defined at the BL drops by 18% of the original figure.



Frequency Response and Impedance Magnitude Curve

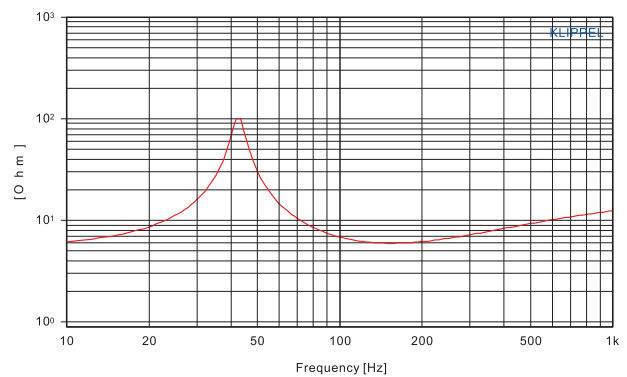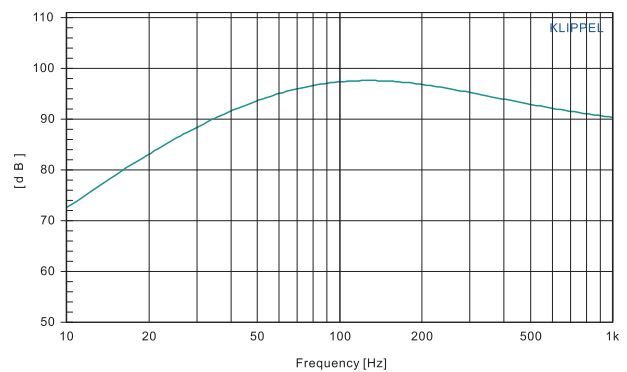

Dimension Drawings

